

*Worksaver.*


*Designed.  
Engineered.  
Remarkable  
Value.*



**WORKSAVER®**

## **Model CS-694, CS-1094 CSP-1094 Spreaders**

**Available in six or ten bushel capacity to meet all your spreading requirements.**

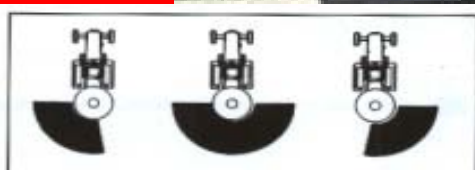

**Choice of (3) Spread Patterns**

# Worksaver Model CS-694, CS-1094, CSP-1094

## MODEL CS-694 SPECIFICATIONS

Capacity .....	Six (6) bu. (500 lb.)
Hopper construction .....	Steel
Main frame construction .....	Tubular Steel
O.D. size of steel tubing (in/mm) .....	2-3/8 / (60mm)
Drive system .....	Tractor PTO
PTO driveline .....	Metric Series I
PTO speed .....	540 rpm
Fully shield drive .....	Standard
Spreader drive .....	PTO / Gear Box
Spreader patterns .....	Left, Center, Right
Hitch requirement .....	Cat. I (7/8" Dia. Lift pins)
Shipping weight (lb./kg) .....	110 / (50 kg)
Product Computer Number .....	420700

## MODEL CS-1094 / CSP-1094 SPECIFICATIONS

Capacity .....	Ten (10) bu. (800 lb.)
Hopper construction .....	Steel (CS-1094) Poly (CSP-1094)
Main frame construction .....	Tubular Steel
O.D. size of steel tubing (in/mm) .....	2-3/8 / (60mm)
Drive system .....	Tractor PTO
PTO driveline .....	Metric Series I
PTO speed .....	540 rpm
Fully shield drive .....	Standard
Spreader drive .....	PTO / Gear Box
Spreader patterns .....	Left, Center, Right
Hitch requirement .....	Cat. I (7/8" Dia. Lift pins)
Shipping weight (lb./kg) (Steel Hopper).....	122 / (55 kg)
(Poly Hopper).....	112 / (51 kg)
Product Computer Number .....	420800 (CS-1094)
Product Computer Number.....	420850 (CSP-1094)

- Choice of (3) spread patterns.
- Adjustable spinner fins.
- Accurate broadcasting of grass seed, wheat or fertilizer.
- PTO operated for optimum performance.
- Fits Category I three-point hitches.
- Tubular steel main frame.
- Optional rotating wheel agitator for lime.
- Symmetric spreading for optimum overlap.
- Cone shaped hopper provides easy material flow.



READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE OPERATION.

Worksaver Inc. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. Worksaver Inc. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.

**Worksaver.**



**Worksaver, Inc.**

P.O. Box 100, Litchfield, IL 62056-0100  
Phone: 217-324-5973 • Fax: 217-324-3356  
E-mail: [sales@worksaver.com](mailto:sales@worksaver.com)  
Web: [www.worksaver.com](http://www.worksaver.com)

Information Provided By:





# **WORKSAVER®**

9 Worksaver Trail - P. O. Box 100 - Litchfield, Illinois 62056-0100  
WEB: <http://www.worksaver.com> E-MAIL: [sales@worksaver.com](mailto:sales@worksaver.com)

# **Electric Seeder / Spreader**

## **For All Terrain Vehicles**

**Spreading and Seeding Jobs Made Easy  
with an ATV Seeder.**

**It's perfect for:**

- Seeding Pastures and Cover Crops**
- Spreading Granular Fertilizer**
- Spreading other Granular Materials**

### **Exclusive Features**

- Maintenance-Free Polyethylene Hopper**
- No Rust!**
- No Corrosion!**
- Puncture-Resistant!**

- Won't Bend as Metal Does-Springs Back to Shape!**
- Won't Crack Under Temperature Extremes!**
- Translucent – Automatic Material Sight Gauge!**
- Easily Mounts in Minutes to Most All A.T.V.'s**



### **OTHER FEATURES**

- A spring held hopper lid to prevent high cost materials like clover seed from spilling or blowing out while keeping moisture out of the hopper.
- A 12-volt electric motor with a variable speed control. Exceptional spread coverage for most seeding conditions.
- Time saving 2-opening seed gate that closes tightly and can be reopened to the same setting.
- Time tested spreader fan. Years of useful service life on other electric and mechanical drive seeders.
- Standard mud and water shield provides protection for the spreader fan and motor.
- Complete wiring package includes clips that simply fasten to the battery terminals.
- Entire unit is easy to attach, easy to remove due to the special lightweight, high strength design of the frame.
- Control lever is positioned to allow the operator to easily reach it. Opening to desired material gate setting is



INFORMATION PROVIDED BY:

## SEEDER/SPREADER MODEL LISTING

*INCLUDES COMPLETE SEEDER/SPREADER, MOUNTING KIT, AND WIRING)*

DESCRIPTION	MODEL	ITEM NO.	WT.
For Arctic 250, 300,400,454,500	ATVK-370	403411	44
For Bombardier Traxter 4 x 4	ATVK-370	403411	44
For Honda 200E "Big Red" ('84 and earlier) For Honda "Big Red" ('85-'87) with rack For Honda 200M ('83/'84) with rack and drawbar For Honda TRX-125 with rack and '86 with rack For Honda TRX-200, TRX-250 ('86 ) For Honda Fourtrax 125 ('85-'86) with rack For Honda Fourtrax 200 Type II, Fourtrax 250, Fourtrax 300 (4x4) For Honda Fourtrax Foreman ('87 and later) For Honda Fourtrax Foreman 400 For Honda SX-250 ('85) with rack For Honda 300, 350 (4 x 4), and 300 (2 wheel drive) For Honda 350 ('86) with rack (4 x 4)	ATVK-350	403410	41
For Honda "Recon" ('98)	ATVK-370	403411	44
For Kawasaki KLT 250 ('84) with rack For Kawasaki Automatic (4 x 4) For Kawasaki Prairie 400 BI	ATVK-350	403410	41
For Kawasaki KLF 300 (4 x 4) For Kawasaki 220, Bayou 220 For Kawasaki Bayou 300 2WD & 4WD For Kawasaki 300 (4 x 4), 400 (4WD) For Kawasaki Lakota 300 For Kawasaki Prairie 300 Automatic, Prairie KVF 400C	ATVK-370	403411	44
For Polaris (3 and 4 wheel drive) ('87 and earlier) For Polaris Trailboss & 250 R/ES For Polaris Trailboss 350L (2 and 4 wheel drive) For Polaris "Big Boss" For Polaris 400 For Polaris 300 "Express" For Polaris Sportsman 335 For Polaris 400 "Explorer"	ATVK-350	403410	41
For Polaris Sportsman 400 & 500 For Polaris Magnum 425 For Polaris Diesel 4 x 4	ATVK-370	403411	44
For Suzuki LT 230 GE with rack For Suzuki LT 250 EF Fourwheeler, LT-F250F For Suzuki LT 250 4WD, LT 250 4WDH, LT 300, LT-F500 For Suzuki LT-A500FY For Suzuki LTF 160M, LTF 4WDX For Suzuki 250 Dual Range For Suzuki Quadrunner 250, 300 For Suzuki Quadrunner 4WD	ATVK-350	403410	41
For Suzuki King Quadrunner 4WD	ATVK-370	403411	44
For Yamaha YFM-200 DX with rack For Yamaha YFM-225/250 (1988 and later) For Yamaha YFM-350 ER For Yamaha YFM-350 "Big Bear" 4 x 4 (to '92) For Yamaha "Terrapro" with PTO For Yamaha "Timberwolf" 4 x 4 with rack For Yamaha "Wolverine" For Yamaha "Big Bear" 400, "Grizzly" 600 For Yamaha "Kodiak" Ultramatic 4 x 4	ATVK-350	403410	41
For Yamaha "Big Bear" ('93 thru '96)	ATVK-390	403412	37
For Yamaha "Kodiak" ('93 thru '96)			
For Yamaha "Big Bear" ('97)	ATVK-420	403414	44

Worksaver, Inc. reserves the right to change specifications and designs without notice.

*Worksaver.*

*Designed.  
Engineered.  
Remarkable  
Value.*



# Model ES-1.5, ES-1.5 PKP, ES-33 Seeders

Rugged all steel construction for increased durability.



# Worksaver

## Model ES-1.5, ES-1.5 PKP, ES-33

### MODEL ES-1.5 / ES-1.5 PKP SPECIFICATIONS

Capacity .....	1-1/2 bu.
Hopper construction .....	Steel
Main frame construction .....	Steel
Fan Diameter (in/mm) .....	13 (330 mm)
Fan Drive .....	Electric motor
Electric motor .....	12 volt
Fan speed .....	Variable
Spreading width (ft/m) .....	Up to 30 (9 m)
Hitch requirement ES-1.5 .....	Draw bar mounted
Hitch requirement ES-1.5 PKP.....	2" hitch receiver
Shipping weight ES-1.5 (lb./kg) .....	45 (20 kg)
Shipping weight ES-1.5 PKP (lb./kg) .....	48 / (22 kg)
Product Computer Number ES-1.5 .....	480001
Product Computer Number ES-1.5 PKP .....	480035

### MODEL ES-33 SPECIFICATIONS

Capacity .....	Three (3) bu.
Hopper construction .....	Steel
Main frame construction .....	Steel
Fan Diameter (in/mm) .....	13 (330 mm)
Fan Drive .....	Electric motor
Electric motor .....	12 volt
Fan speed .....	Variable
Spreading width (ft/m) .....	Up to 30 (9 m)
Hitch requirement .....	Draw bar mounted
Shipping weight (lb./kg) .....	70 (32 kg)
Product Computer Number .....	420500

### USX-3 Optional 3 bu. Hopper extension for ES-33

Product Computer Number ES-1.5 .....	420100
--------------------------------------	--------

- Rugged all steel construction for increased durability.
- Non-corrosive fan for long life and reduced maintenance.
- Positive action seed gate with an adjustable lock scale plate control. Allows quick return to original setting.
- Powered by a standard 12-volt battery for economical seeding.
- Ideal for pickups, jeep and tractors.
- Enables you to sow all grasses, clover, alfalfa, timothy, oats, brome grass, etc.
- Scribed scale plate helps eliminate guesswork on material application.



READ AND UNDERSTAND OPERATOR'S MANUAL BEFORE OPERATION.

Worksaver Inc. has a corporate policy of continuous product improvement and development; therefore, specifications are subject to change without any advance notice. Worksaver Inc. is not responsible for differences between specifications or illustrations contained in this publication and the actual equipment.

*Worksaver.*



*Worksaver, Inc.*

P.O. Box 100, Litchfield, IL 62056-0100  
Phone: 217-324-5973 • Fax: 217-324-3356  
E-mail: [sales@worksaver.com](mailto:sales@worksaver.com)  
Web: [www.worksaver.com](http://www.worksaver.com)

Information Provided By:

