



ROTARY BRUSH CUTTER

**THE LEADER OF THE PACK
ANY WAY YOU CUT IT.**

These heavy duty cutters can handle your most demanding cutting jobs, year after year.



MODEL 6000



MODEL 6600



MODEL 7200




MODEL 7800



MODEL 9000

BRUSH WOLF FEATURES

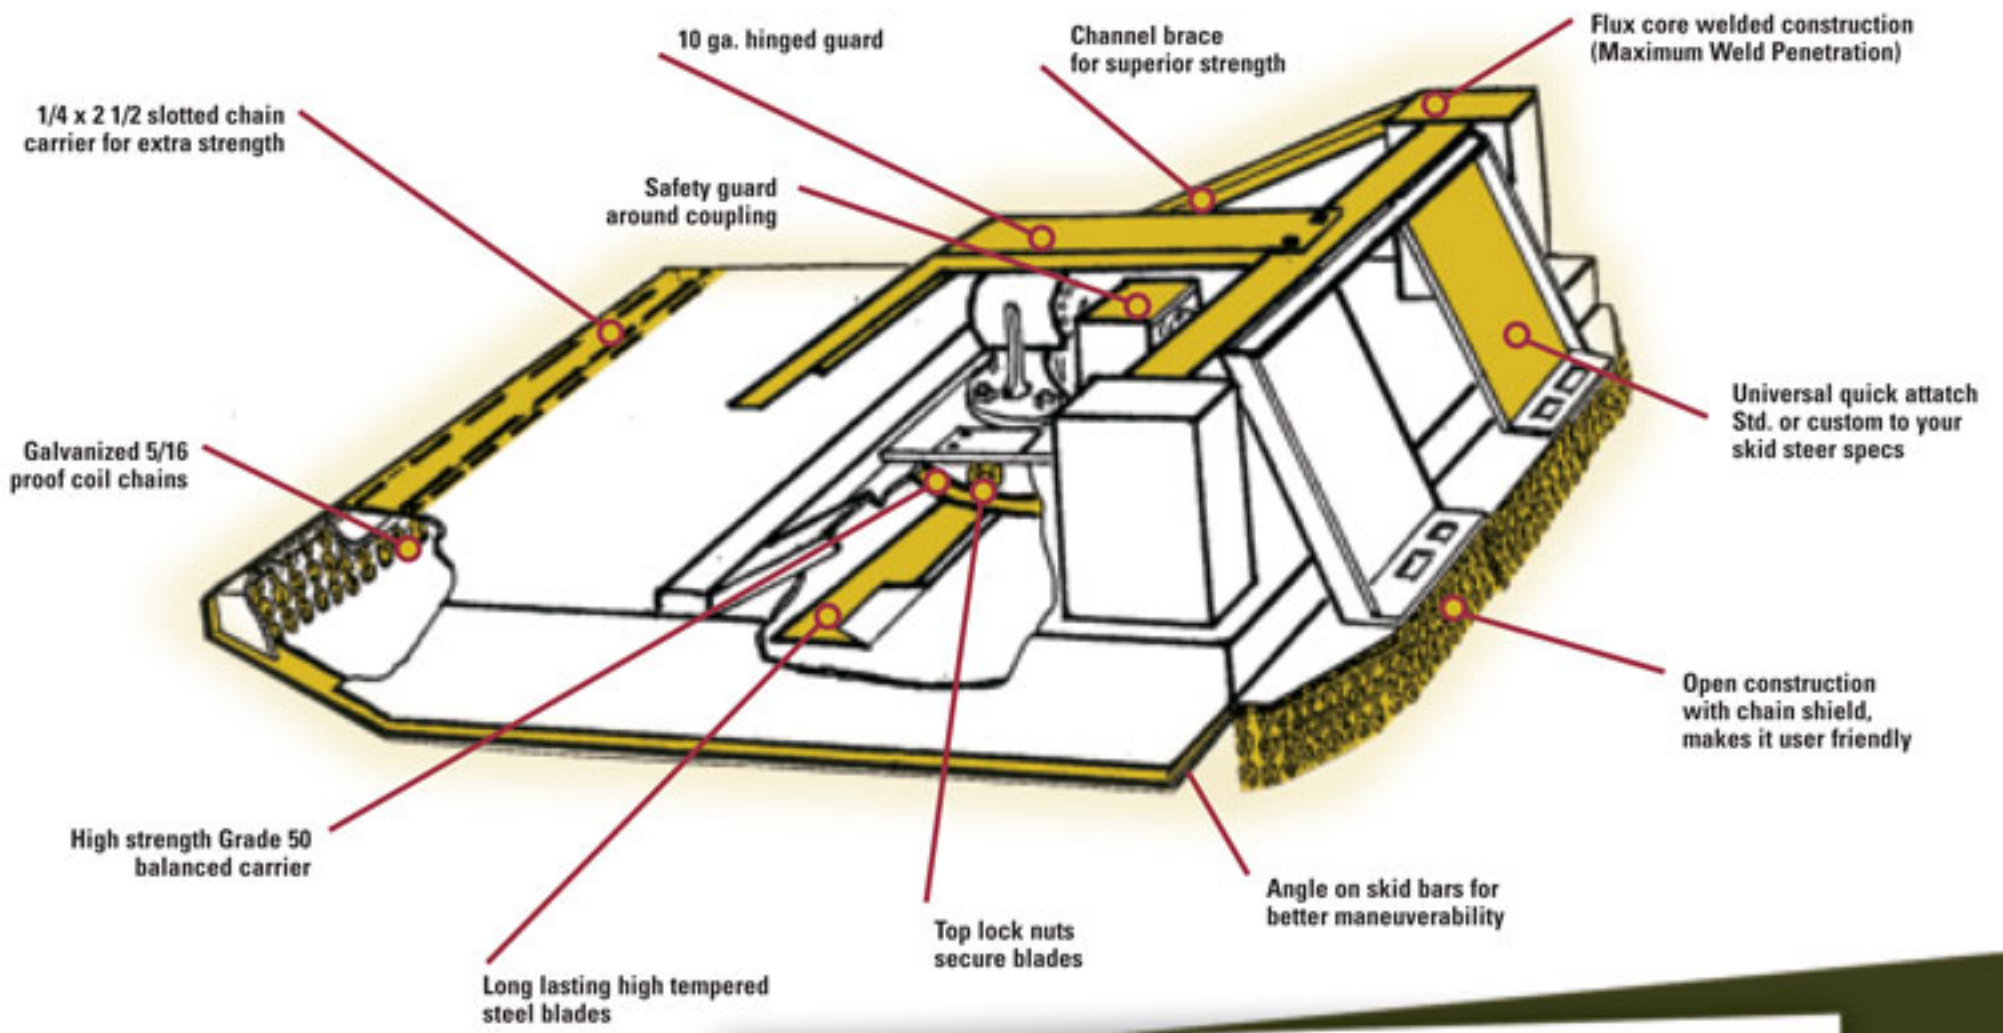

BEFORE



AFTER

A BRUSH WOLF ROTARY CUTTER WITH STANDARD MULCHING BLADES WILL PUT MORE MONEY IN YOUR WALLET AT THE END OF YOUR WORKING DAY.

BRUSH CUTTER SPECIFICATIONS

MODEL	4800 LF LOW FLOW	4800	6000 LF LOW FLOW	6000	6000 HF HIGH FLOW	6600	6600 HF HIGH FLOW
OVERALL WIDTH	50"	50"	62"	62"	62"	68"	68"
OVERALL LENGTH	61"	61"	73"	73"	73"	79"	79"
BLADE CARRIER TYPE	BAR	BAR	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN
BLADES	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"
BLADE ROTATION	CCW	CCW	CCW	CCW	CCW	CCW	CCW
CUTTING CAPACITY MAX.	2"	3"	2"	3"	4"	3"	4"
DRIVE PROTECTION	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT
MOTOR / GEARBOX COUPLER	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL
MOTOR PROTECTION	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK
DECK THICKNESS	7 GA.	7 GA.	1/4"	1/4"	1/4"	1/4"	1/4"
NYLON HOSE SLEEVES	STD.	STD.	STD.	STD.	STD.	STD.	STD.
FLAT FACE COUPLINGS	STD.	STD.	STD.	STD.	STD.	STD.	STD.
GEARBOX SEAL GUARD	STD.	STD.	STD.	STD.	STD.	STD.	STD.
REQUIRED GPM	8 - 25	13 - 30	10 - 25	15 - 30	30 - 40	15 - 30	30 - 40
WEIGHT	569 LBS	599 LBS	910 LBS	940 LBS	965 LBS	1020 LBS	1046 LBS
PSI MIN. / MAX.	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500

MODEL	7200	7200 HF HIGH FLOW	7800	7800 HF HIGH FLOW	9000	9000 HF HIGH FLOW
OVERALL WIDTH	74"	74"	80"	80"	93.5"	93.5"
OVERALL LENGTH	85"	85"	91"	91"	62"	62"
BLADE CARRIER TYPE	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	HI STRENGTH GR50 PAN	1" THICK DISC	1" THICK DISC
BLADES	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"	1/2" X 4.00"
BLADE ROTATION	CCW	CCW	CCW	CCW	SYNCHRONIZED	SYNCHRONIZED
CUTTING CAPACITY MAX.	3"	4"	3"	4"	3"	3"
DRIVE PROTECTION	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT	GR2 BOLT
MOTOR / GEARBOX COUPLER	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL	MACHINED STEEL
MOTOR PROTECTION	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	CUSHION BLOCK	BY - PASS	BY - PASS
DECK THICKNESS	1/4"	1/4"	1/4"	1/4"	1/4"	1/4"
NYLON HOSE SLEEVES	STD.	STD.	STD.	STD.	STD.	STD.
FLAT FACE COUPLINGS	STD.	STD.	STD.	STD.	STD.	STD.
GEARBOX SEAL GUARD	STD.	STD.	STD.	STD.	STD.	STD.
REQUIRED GPM	15 - 30	30 - 40	15 - 30	30 - 40	15 - 30	30 - 40
WEIGHT	1094 LBS	1120 LBS	1145 LBS	1175 LBS	1235 LBS	1260 LBS
PSI MIN. / MAX.	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500	2500 / 3500

Compare quality, value and performance and you won't consider anything less than a Brush Wolf Rotary Brush Cutter.

- If those things aren't enough to convince you to go with the leader of the pack, consider our exclusive warranty.

- **3 YEARS ON THE HYDRAULIC MOTOR**

- **1 YEAR ON THE MANUFACTURED PARTS**

- Our wide ranging dealer network means any needed parts and service are always easily accessible.


- There's a Brush wolf perfectly suited for your job and your skidsteer, your dealer will help you select the model that's right for you.

- Every Brush Wolf is designed to deliver durability, dependability and value that's always a cut above.

A CUT ABOVE THE COMPETITION!

Hit the hydraulic switch and experience first hand the power of the world's most serious brush cutting machines. Just one pass through the thickest brush will tell you all you need to know about why we're recognized around the world as the leader of the pack.

- A. Every drive line assembly is engineered and precision machined for a positive alignment, and a grade 2 bolt ensures the integrity of the complete drive line, allowing you years of dependable service.
- B. Our blade carriers are heavy duty, balanced and are of the highest quality, to give you the strength and durability that makes Brush Wolf "A cut above the competition."
- C. For maximum strength and durability up front, our 1/4" slotted angle chain carrier is welded solid, and holds our 5/16" galvanized chain.

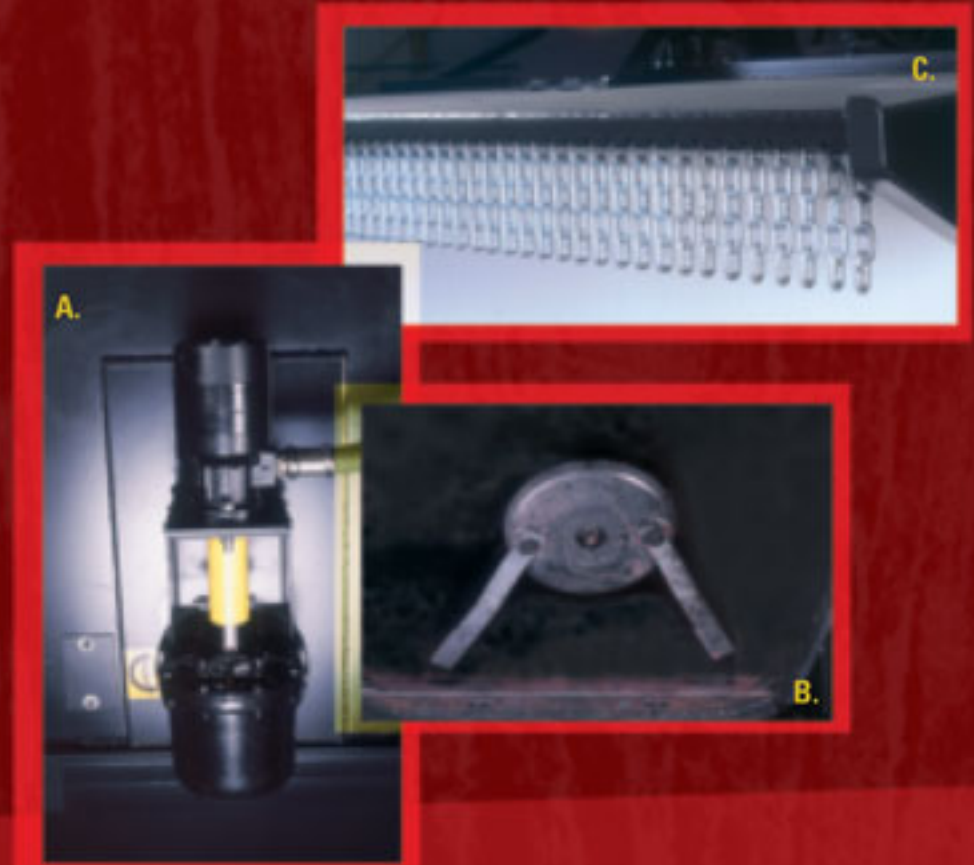

COMPARE
QUALITY VALUE
AND PERFORMANCE
AND YOU WON'T CONSIDER
ANYTHING LESS THAN
A BRUSH WOLF



MODEL **7200**

THESE CUTTERS ARE LIGHT, BUILT LEAN AND MEAN,
 YET TOUGH ENOUGH TO HANDLE YOUR MOST
 DEMANDING CUTTING JOBS, YEAR AFTER YEAR.

PERFORMANCE DATA

BLADE TIP SPEED/FEET PER MINUTE

MODEL	MINIMUM	MAXIMUM
4800 LF	9,142 @ 8 GPM	28,665 @ 25 GPM
4800	9,089 @ 13 GPM	26,006 @ 30 GPM
6000 LF	11,474 @ 10 GPM	35,717 @ 25 GPM
6000	13,109 @ 15 GPM	17,835 @ 30 GPM
6000 HF	13,345 @ 30 GPM	17,803 @ 40 GPM
6600	10,228 @ 15 GPM	20,268 @ 30 GPM
6600 HF	14,784 @ 30 GPM	19,561 @ 40 GPM
7200	11,158 @ 15 GPM	22,090 @ 30 GPM
7200 HF	16,128 @ 30 GPM	21,319 @ 40 GPM
7800	12,088 @ 15 GPM	23,970 @ 30 GPM
7800 HF	17,472 @ 30 GPM	23,133 @ 40 GPM
9000	13,099 @ 22 GPM	17,871 @ 30 GPM
9000 HF	12,915 @ 30 GPM	17,216 @ 40 GPM



Cross-Tech MFG., Inc.
 33877 Gendreau Rd.
 Crosslake, MN 56442-9303

Toll Free: 877-390-9857
 Local: 218-692-1050
 Fax: 218-692-1051

www.brushwolf.com
 cross-tech@brushwolf.com