




THRIFTY CUTTER

THRIFTY *Cutter*

The **Thrifty Cutter** Series Rotary Cutters provide excellent mowing and shredding performance for tractors rated between 20-40 horsepower. They are available in widths of 4', 5', 5½', 6' and 7' with an adjustable cutting height of two to ten inches.

All models are constructed with rugged reliable performance in mind. Mower decks are constructed of heavy gauge steel plate and electrically welded for maximum strength and rigidity. The heavy duty free swing blades are made of heat-treated alloy steel with high suction design for cleaner mowing. The free wing feature allows blade to swing back when striking solid objects like stumps or rocks.

Cuts Weeds, Mows Grass and Shreds Stalks.
Available in 4-5-5½-6-7 Foot Models

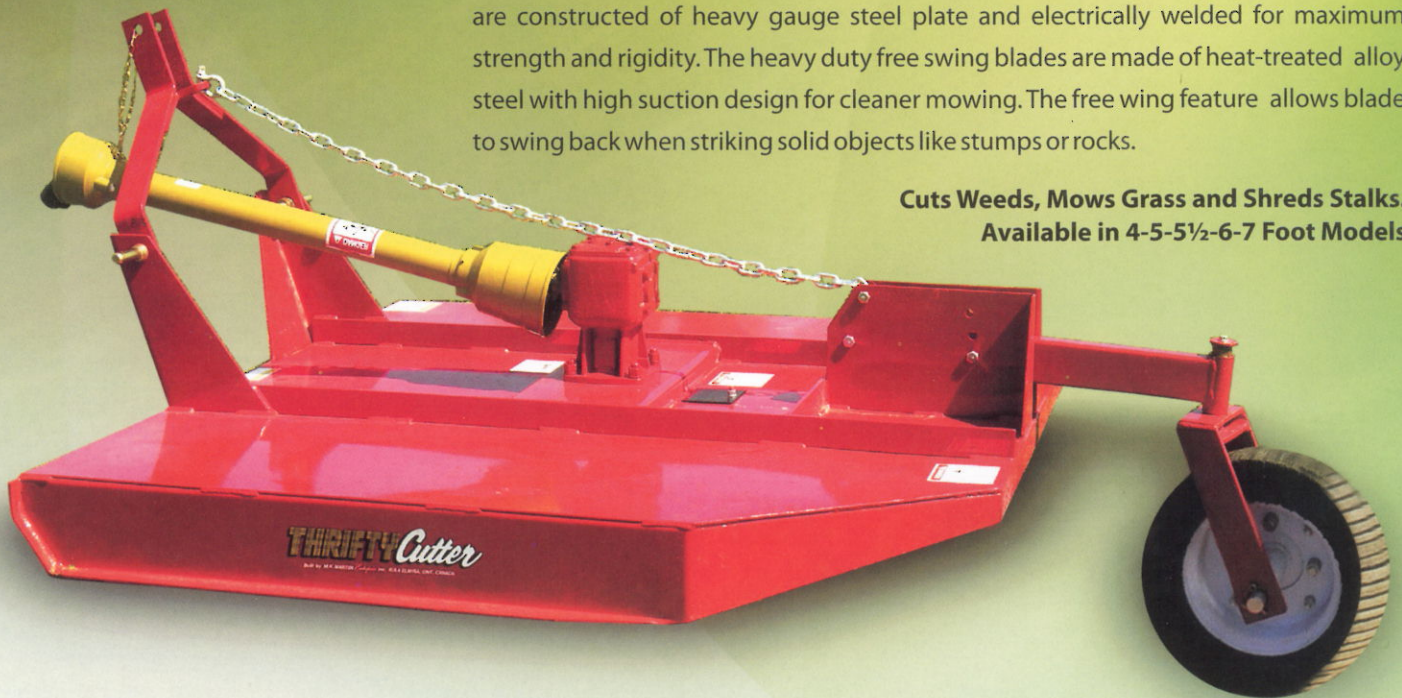

	MTC42	MTC48	MTC60	MTC66	MTC66H	MTC72L	MTC72H	MTC84H
SHIPPING WEIGHT	440	480	600	640	675	700	740	1080
HITCH	3-POINT	3-POINT	3-POINT	3-POINT	3-POINT	3-POINT	3-POINT	3-POINT
CUTTING HEIGHT	2 -10	2 -10	2 -10	2 -10	2 -10	2 -10	2 -10	2 -10
WHEELS	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED	16 SEGMENTED
BLADES	½ x 3	½ x 3	½ x 3	½ x 3	½ x 3	½ x 3	½ x 3	½ x 3
TRACTOR H.P. (min)	20	20	30	40	40	50	50	70
P.T.O. RPM	540	540	540	540	540	540	540	540
GEARBOX RATING	40HP	40HP	40HP	40HP	60HP	40HP	60HP	60HP
DECK	10 GA.	10 GA.	10 GA.	10 GA.	10 GA.	10 GA.	10 GA.	9 GA.
STUMP JUMPER	YES	YES	YES	YES	YES	YES	YES	YES
SHEAR PIN	STANDARD	STANDARD	STANDARD	STANDARD	SLIP CLUTCH	STANDARD	SLIP CLUTCH	SLIP CLUTCH

FINISHING MOWER

The ThriftyCutter finishing mower gives a wide variety of lawn mowing applications. Our 3 rear discharge sizes will give the option of selecting the right size for your mowing needs. These mowers feature pneumatic tires to give the mower smooth flotation over your lawn. The floating top link allows the mower to follow the contour of the lawn. All mowers are coated with epoxy primer and acrylic paint.



THRIFTY Cutter



SPECIFICATIONS	60" RD	72" RD	90"RD
CUTTING WIDTH	57"	69"	87"
OVERALL WIDTH	64"	76"	94"
ACRES/HR @ 5 MPH	3.03	3.63	4.57
HP REQUIRED	14/22	18/25	20/25
3 PT HITCH	CAT.1	CAT.1	CAT.1
RPM @ PTO SHAFT	540	540	540
NUMBER OF BLADES	3	3	3
BLADE TIP SPEED	15550	16775	15715
WHEELS	4.10/3.50-4	4.10/3.50-4	4.10/3.50-4
WEIGHT	473 LBS	500 LBS	650 LBS

3950 Steffler Road
 Elmira, Ontario
 Canada N3B 2Z3

Tel: **519-664-2752**

Fax: 519-664-3695