

Heavy duty Rotary tillers with adjustable offset for tractors from 15 to 68 HP, with single speed gearbox P.T.O. 540 r.p.m. The machine has a high quality sturdy structure, but at the same time it is light and suitable for small-medium tractors.


The Tonutti Rototiller is ideal for use with tractors that require relatively light implements; it is particularly recommended for tilling soil for the more demanding crops, in vineyards and orchards.

- Side chain drive in oil bath
- Universal three point hitch, cat. I and II
- Offset adjustment
- Single speed gearbox 540 r.p.m. P.T.O.
- P.T.O. shaft with slip clutch
- 4 blades per flange
- Packaging: 3 tillers on a steel rack and wrapped with film. Tillers can be unloaded singularly.

**tonutti**<sup>®</sup>  
SINCE 1864

Always one step ahead<sup>®</sup>

# TMA ROTOTILLER

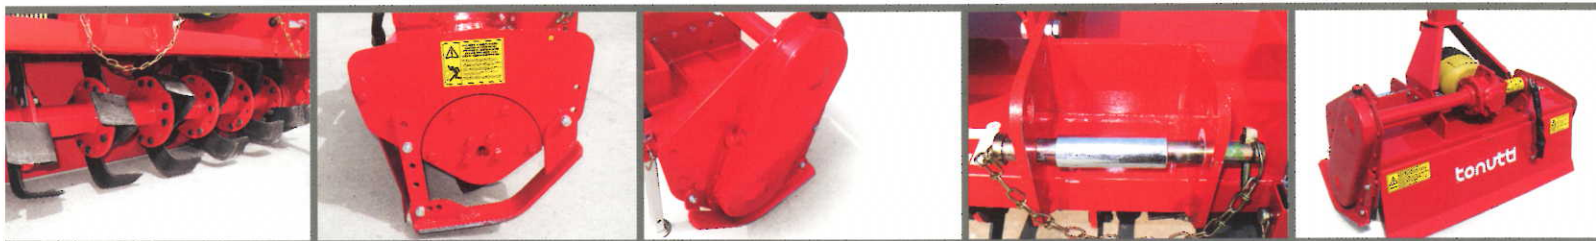

High quality Italian made blades, 4 blades per flange  
Optional: 6 blades per flange

Easy working depth adjustment with side skids

Side chain drive in oil bath with chain tensioner and oil check plug

The offset adjustment possibility allows this rotary tiller to be used in a central and side position with respect to the wheel track of the tractor

Rear view

primastudio ucine

DESCRIPTION	TM 120	TM 150	TM 180	TM 205
Working width	120 cm (48")	150 cm (59")	180 cm (71")	205 cm (81")
HP / KW requirement	15-25/11-19	25-42/19-31	35-55/26-42	45-68/34-50
Number of flanges	6	7	9	10
Number of blades per flange	6	6	6	6
Number of blades	36	42	54	60
PTO	540 rpm	540 rpm	540 rpm	540 rpm
Weight of machine	216 kg (475 lbs)	257 kg (565 lbs)	298 kg (655 lbs)	339 kg (745 lbs)
Offset possibility	20 cm (8")	20 cm (8")	20 cm (8")	20 cm (8")
Working depth	5 - 12 cm (2" - 6")	5 - 12 cm (2" - 6")	5 - 12 cm (2" - 6")	5 - 12 cm (2" - 6")
Roller chain size	20 B	20 B	20 B	20 B



TONUTTI reserves the right to make changes or add improvements at any time without notice. The information contained herein is general in nature and is not intended for specific application purposes.



cod. 88 91 00 00 11/05



Always one step ahead®



**Tonutti SpA**  
Via Gino Tonutti 3 - 33047  
Remanzacco (UD) Italy  
Tel. + 39 0432 667015  
Fax + 39 0432 668282  
info@tonutti.it  
www.tonutti.it

**Tonutti U.S.A.**  
S&T Distributing, Inc.  
1909 Thomas Road  
Memphis, TN 38134  
Phone (901) 385 8841  
Fax (901) 385 8288  
s-t-dist@bellsouth.net

**Tonutti Russia**  
G.M.T. Limited  
3 Tekhnicheskaya Street  
Perm, 614070 Russia  
Phone 007 (3422) 909096  
Fax 007 (3422) 909096  
gmtltd@perm.ru